


BT77 Compact Bearing Diagnostic Tester

軸承診斷檢測儀

- 針對軸承快速診斷
- 潤滑保養更有功效
- 專利規格之診斷感測器
- 可外接轉速計
- 六個按鍵，操作簡易
- 掌上型設計、輕巧
- IP65 防護外殼
- 內建儲存記憶體
- 傳輸資料至電腦
- USB 傳輸埠

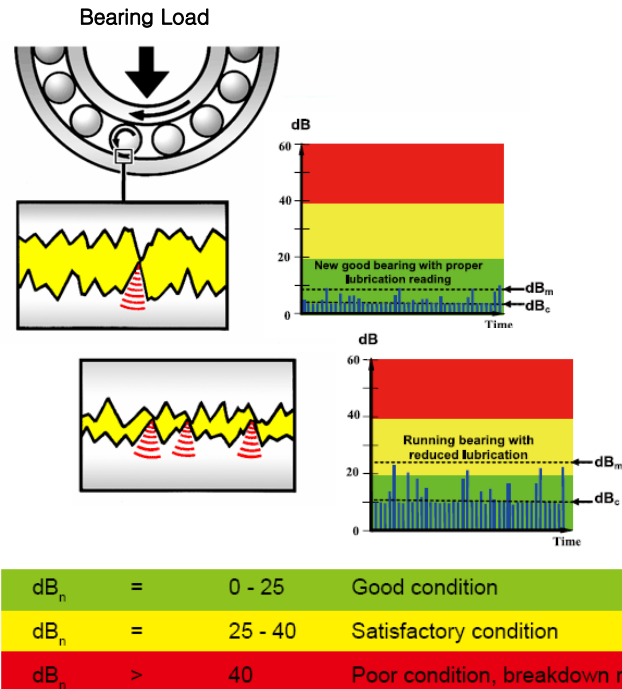

Shock Pulse Method (S.P.M.)

此量測法已有數十年以上的工業應用經驗，專門運用量測各式之滾珠和滾柱軸承，可快速精確的提供軸承之運轉狀態的相關訊息，讓潤滑保養工作更有效率及降低用油成本。

dBm/dBc 量測技術

只要輸入轉軸直徑和轉速，進行量測在數秒內即可測得 dBm/dBc 數值，不需有複雜的診斷技巧就可判斷軸承運轉狀態之優劣。

Date / time	Tunings			Measurements		Results of diagnostics, recommendations	Bearing	Lubrication
	N (RPM)	Inner bear dia (in)	Init Level	dBm	dBc			
<i>PT Petrokimia Gresik\Untitled workshop1\Untitled route1_0514_095219</i>								
05/14/07 10:24:00	200	80	7	24	16	The generation of defects of bearing. Satisfactory condition of lubrication. Partial additive of lubrication.		
05/14/07 10:27:04	1000	85	20	12	8	Good state of bearing. Good state of lubrication.		
05/14/07 10:29:56	2000	85	26	11	6	Good state of bearing. Good state of lubrication.		
05/14/07 10:31:28	5000	85	34	11	7	Good state of bearing. Good state of lubrication.		
05/14/07 10:33:04	1000	80	21	10	4	Good state of bearing. Good state of lubrication.		
05/14/07 10:34:40	2000	80	27	10	3	Good state of bearing. Good state of lubrication.		
05/14/07 10:36:14	5000	80	35	16	8	The generation of defects of bearing. Good state of lubrication.		
05/14/07 10:38:32	200	80	7	25	18	The generation of defects of bearing. Satisfactory condition of lubrication. Partial additive of lubrication.		
05/14/07 10:39:48	200	85	6	27	18	The generation of defects of bearing. Satisfactory condition of lubrication. Partial additive of lubrication.		
05/29/07 16:07:00	800	80	19	-9	-19	Good state of bearing. Good state of lubrication.		

系統標準配件：

- BT77 操作主機
- 診斷感測器
- 紅外線轉速計(含 1.5 米線)
- 轉速計磁性固定組
- 110V 充電器
- USB 傳輸線(1.5 米)
- Conspect CD-ROM
- 中文操作手冊
- 手提攜帶箱
- Mark Calibration
- Quality Certificates